



KONICA MINOLTA

Applications for Vehicle Evaluation **Color and Light Measuring Instruments**




Object color

Light source color

Vehicle evaluation application examples


- Object color
- Light source color

License plates

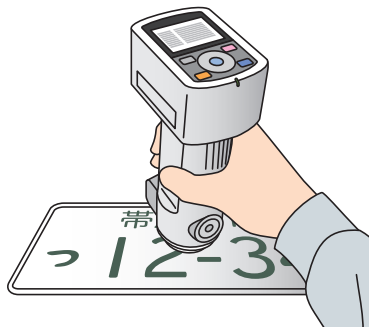

Spectrophotometer **CM-700d**

Exterior paint
(Orange Peel / Distinctness of Image)

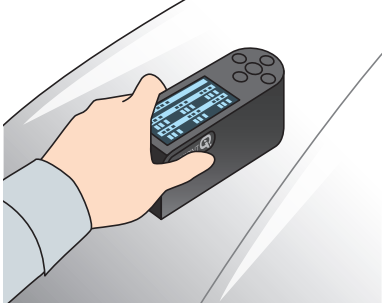

Appearance analyzers
Rhopoint IQ-S **DOI**
Rhopoint IQ Flex20 **DOI**

Automotive window glass



Spectrophotometer **CM-700d**
(Spectral reflectance measurement of glass)
Spectrophotometer **CM-5**
(Spectral transmittance measurement of glass)

Door mirrors
Door handles



Spectrophotometer **CM-M6**

Side mirror warning indicators



2D luminance colorimeter **CA-2500A**

Brake lamps, signal lamps, fog lamps, hazard lamps, etc.



Illuminance colorimeter **CL-200A**
(For vehicle inspections)
2D luminance colorimeter **LumiCam 1300 Color/Advanced**


Exterior paint
(Metallic pearlescent, etc.)




Spectrophotometer **CM-M6**

» EXTERIOR [Exterior paint]

Headlamps (High illuminance)

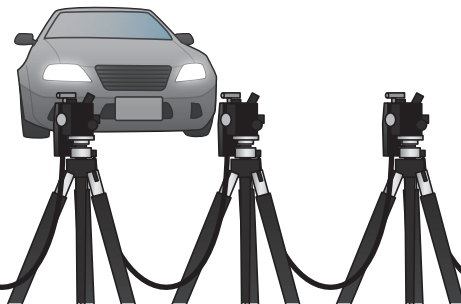


Illuminance meter **T-10A** (Multi-point measurement)
(For light distribution measurement)

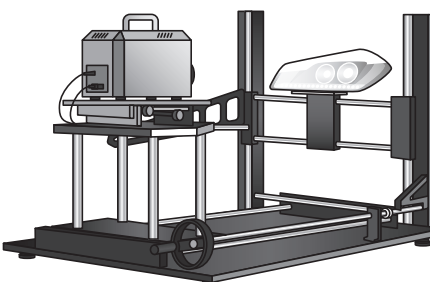


2D luminance colorimeter **LumiCam 1300 Color/Advanced**

Headlamp light distribution
Road illuminance distribution

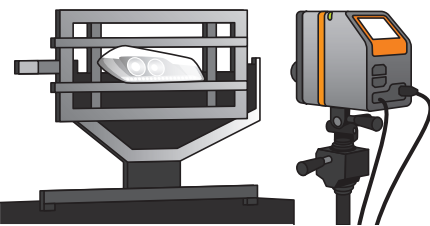


Near-Field Measurement System **PM-NFMS™**

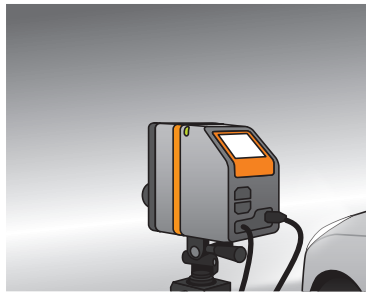


2D luminance colorimeter **ProMetric® I series**
Analysis software **PM-HL™**

Aluminum wheels



Appearance analyzer **Rhopoint IQ Flex20** **Gloss, Haze**
Colorimeter **CR-400**

Tires



Colorimeter **CR-400**




Dashboards, Interior parts



Spectrophotometer **CM-700d**
(Color control of interior parts with curved surfaces and shapes)



Spectrophotometer **CM-25cG** **Gloss**
Spectrophotometer **CM-26d/CM-25d**
(Color control of parts with differing textures)

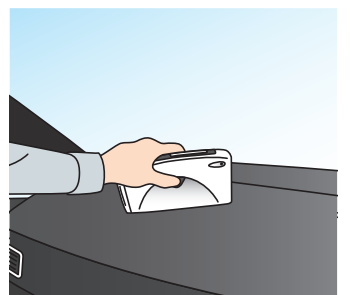

Glossmeters
MULTI GLOSS 268A/UNI GLOSS 60A **Gloss**



Interior illumination: Ceilings, etc.



Spectroradiometer **CL-500A**
Spectral radiance system **DTS 140** ■
Illuminance meters **T-10MA**
(Multi-point measurement)




Interior illumination: LED strip lights



2D colorimeter luminance colorimeters
CA-2500A
ProMetric® I Series ◆




Mirrors (Interior)




Spectrophotometer **CM-700d**
(For surface reflectance measurement)



Instrument panels

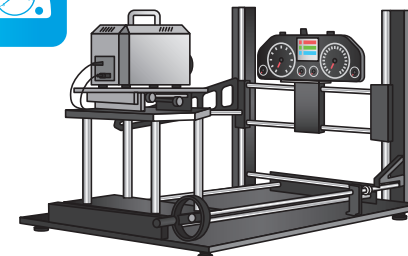


2D luminance colorimeters
LumiCam 1300 Color/Advanced ■
ProMetric® I Series ◆

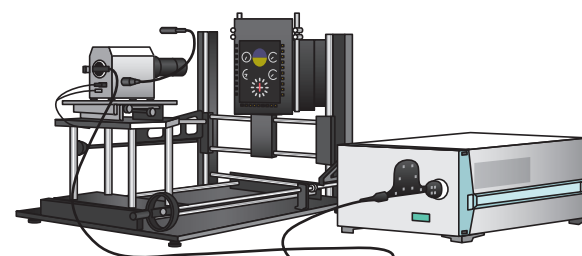

Spectral radiance system DTS 140 ■

Luminance, chromaticity mura and flaw detection of indicators, etc.



2D luminance colorimeter
ProMetric® I Series ◆
+ Automobile visual inspection software
TrueTest™



Piano Black finish



Spectrophotometer **CM-25cG** **Gloss**
Spectrophotometer **CM-26d/CM-25d**

Appearance analyzer
Rhpoint IQ-S **Gloss, Haze**

INTERIOR [Car Interiors]



Brightness and chromaticity checks of light sources



Luminance meters **LS-150/LS-160**
Luminance colorimeters **CS-150/CS-160**



Vehicle-mounted cameras



Spectroradiometer
CL-500A

Colorimeter
CL-200A
(Environmental evaluation/
Calibration light source evaluation)

Luminance colorimeter
CS-200
(Camera light source
evaluation)

Energy/Spectral evaluation of near-infrared LEDs

Spectral radiance measurement system **DTS 140** ■
(Measurable wavelength range: 380 - 1040 nm)
Spectral irradiance measurement system ■
(Measurable wavelength range: 300 - 1100 nm)




Plated parts (Curved/Small surfaces)



Appearance analyzers
Rhpoint IQ Flex20 **Gloss, Haze**
Rhpoint IQ-S **Gloss, Haze**




Heads-up displays

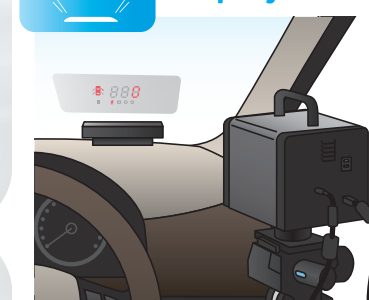

2D luminance colorimeter **CA-2500A**
LumiCam 1300 Color/Advanced ■
ProMetric® I Series ◆


Laser light source measurement




Spectral radiance measurement systems **DTS** ■
Uses CAS120 spectroscopy
(Measurable wavelength range: 360 - 830 nm)
(Pixels: 2,048 x 14
Spectral resolution: 2.2 nm
Data point interval: 0.3 nm)




Car navigation/Central information displays



2D luminance colorimeters **CA-2500A**
LumiCam 1300 Color/Advanced ■
(For black mura evaluation)
ProMetric® I Series ◆
(For black mura evaluation/
scratch detection and other evaluations)



Spectroradiometer **CS-2000A**
Spectral radiance system DTS 140 ■
Display color analyzer **CA-410**




Viewing Angle Performance
Measurement Solution for Displays
Conoscope Lens
(For ProMetric® Y/I Series)



Spectrophotometer **CM-700d**
(For surface reflectance measurement)
Glossmeter **MULTI GLOSS 268A** **Gloss**
Appearance analyzer
Rhpoint IQ-S **Gloss**



Uneven illumination of AC/audio switches

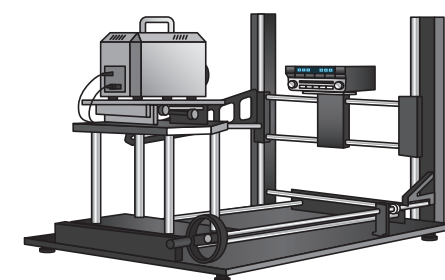

2D luminance colorimeters
LumiCam 1300 Color/Advanced ■
ProMetric® I Series ◆
Spectral radiance system **DTS 140** ■
Spectroradiometer **CS-2000A**




Steering wheels



Spectrophotometer
CM-700d



Car seats and ceiling materials



Colorimeter
CR-410



Interior door trim



Spectrophotometer
CM-700d

Lineup of color and light measuring instruments

Object color

Spectrophotometers

CM-700d /CM-600d

These easy-to-operate handheld spectrophotometers condense the latest optical technologies from Konica Minolta plus the high precision and functionality of Konica Minolta's benchtop models into a low-cost, compact and highly portable size. They are perfect for measuring colors of automotive interiors. Offers both $\varnothing 8$ and $\varnothing 3$ mm measurement areas. (CM-700d)



CM-25cG

This 2-in-1 model simultaneously measures chromaticity and gloss. Its form and function are suited for managing the color and gloss of vehicle interiors. Moreover, it offers two different measurement areas.

Color $\varnothing 8$ mm/ $\varnothing 3$ mm
Gloss $\varnothing 10$ mm/ $\varnothing 3$ mm



CM-26d /CM-25d

di:8, de:8 (diffuse illumination/8° viewing) integrating sphere models with streamlined bodies optimized for color management of automotive interior parts. Top-of-the-line CM-26d achieves industry's highest level of inter-instrument agreement and repeatability.

Measuring area: $\varnothing 8$ mm/ $\varnothing 3$ mm switchable (CM-26d);
 $\varnothing 8$ mm only (CM-25d)



CM-M6

Compact, lightweight model for multiple (6) angle measurement. The vertical body incorporates a "Double-Path Optical System" that can stably measure curved surfaces and small targets, making it the tool of choice for measuring exteriors.

Measurement area $\varnothing 8$ mm



CM-512m3A

This multi-angle spectrophotometer is for measuring metallic and pearlescent colors commonly used in automotive exterior paints. A single measurement simultaneously illuminates targets at 3 angles -- highlight (25°), flat (45°) and shade (75°) -- for reading colors. It can also measure colors on curved surfaces. $\varnothing 12$ mm measurement area.



CM-3700A

This reference spectrophotometer packages Konica Minolta's state-of-the-art optical technologies to ensure high accuracy. It is a wise choice for users who apply stringent controls in their pursuit of high quality.



CM-5

Despite being compact in size and light in weight, this all-in-one spectrophotometer comes with a top port and a large color LCD that simplify sampling, measurement and analysis. It is perfect for measuring the transmittance of windshield glass before installation.



Colorimeters

CR-400

Top-seller around the world. De facto standard in handheld colorimeters. $\varnothing 8$ mm measurement area.



CR-410

This handheld colorimeter features a wide aperture that is highly suited for measuring samples with uneven surfaces or patterns. $\varnothing 50$ mm measurement area.

Glossmeters

MULTI GLOSS 268A/UNI GLOSS 60A

These instruments measure the gloss of target surfaces. They are perfect for gloss control operations intended to reduce the degree to which dashboards reflect off of windshields. They also feature a wide measurement range (0.0 - 2,000 GU) that can accommodate anything from plastic to shiny metallic surfaces.



Appearance analyzers

Rhopoint IQ-S/IQ Flex20

These meters can measure gloss, reflection haze, image clarity and rspec. The Rhopoint IQ-S series is capable of evaluating reflectance characteristics and surface conditions that conventional glossmeters cannot. The IQ Flex features a small aperture probe for measuring small components and curved surfaces.



Light source color

Illuminance meters, luminance meters and spectradiometers

CL-500A

The CL-500A can be used to inspect and control the quality of indoor LED lighting. As a handheld device, it facilitates measurements around door steering wheels, under seats and other hard-to-get-to vehicle interiors locations. It is lightweight, compact and suited for color-rendering index evaluation of light sources, and conforms to both JIS and DIN. The CL-500A can measure and display the color rendering index, photopic illuminance (lx), scotopic illuminance (lx), correlated color temperature (K) and chromaticity (xy) of light sources.



Colorimeter

CL-200A

This compact and lightweight colorimeter is perfect for measuring the chromaticity of white LEDs. It can measure and display the correlated color temperature (K), chromaticity (xy), photopic illuminance (lx), tristimulus values (XYZ), dominant wavelength and excitation purity of light sources.



Illuminance meters

T-10A/T-10MA

These highly accurate illuminance meters conform to JIS Class AA and DIN Class B. They can accurately measure next-generation PWM-controlled lighting sources. They can also be incorporated into testing systems for multi-point measurements.



Spectral radiance measurement systems

DTS 140

This system uses a telescopic probe to measure the spectral radiance of vehicles and displays. It can measure microscopic areas as small as $\phi 75 \mu\text{m}$.



Spectroradiometers

CS-2000A /CS-2000

This spectroradiometer employs Konica Minolta's proprietary optical design and signal processing technologies to accurately measure luminance as low as 0.0005 cd/m^2 and chromaticity.



Luminance colorimeters

CS-200

This luminance colorimeter adopts a spectral fitting method to measure luminance and chromaticity to a degree of accuracy near to that of spectroradiometers.



CS-150 /CS-160

These luminance colorimeters are designed and built for ease of use and accuracy. They are compact, lightweight, easy to operate and capable of measuring an area of $\phi 0.4 \text{ mm}$ (CS-160).



Luminance meters

LS-150 /LS-160

These luminance meters are designed and built for ease of use and accuracy. They are capable of measuring luminance of about $1,000,000 \text{ cd/m}^2$ (LS-160).



Display color analyzer

CA-410

This analyzer can measure the luminance and chromatic flicker of vehicle-mounted displays used for car navigation systems, etc. at high speed and to a high degree of accuracy.



2D luminance colorimeters

CA-2500A

This analyzer measures the luminance and chromaticity of vehicle-mounted displays in 2 dimensions at high resolution. It is suited for development and testing since it can perform measurements, analyses and evaluations very efficiently in a short amount of time. It can accommodate targets of varying size owing to a wide array of interchangeable lenses.



LumiCam 1300 Color/Advanced ■

This instrument can easily measure the luminance and chromatic distribution of automotive meters and other targets in a short amount of time. It incorporates 6 filters and is highly accurate, which makes it perfect for measuring DRL (Daytime Running Lights).

High accuracy



ProMetric® I /Y Series ◆

These series of photometers measure luminance and chromatic distribution at high resolution. They can also detect missing pixels and uneven photometric performances of vehicle-mounted displays when used in conjunction with the optional TrueTest™ software. Applicable to inline use.

* Y series photometers measure only luminance distribution.



High speed

Conoscope Lens for Viewing Angle Performance Measurement Solution for Displays ◆

(For ProMetric® Y/I Series)

This lens can be attached to a ProMetric® Y or I instrument to measure the luminance and chromaticity of vehicle-mounted displays and films such as AR coatings, across a $\pm 58^\circ$ angle viewing cone, in a single shot and at high speed. The lens can be detached in order to use the ProMetric® instrument as a 2-dimensional luminance meter.

* The 2-dimensional luminance meter shown here.



Lumicol 1900U/F ■

These photometers measure luminance and chromatic distribution at high speed. They are suited for adjusting and inspecting automotive display panels along production lines.


High speed



Near-Field Measurement System

PM-NFMS™ ◆

This near-field light distribution measurement system can analyze the luminance and chromatic characteristics of headlamps at every angle, in a short amount of time and without taking up a lot of space. The system consists of a ProMetric (Y/I series) photometer, a 2-axis goniometer and software.



Automatic appearance inspection software

TrueTest™ ◆

This software automates the visual appearance inspections of FPDs, backlight units and other products along production lines. Supported by both the ProMetric® I/Y series.



Applications for Vehicle Evaluation

Color and Light Measuring Instruments

- KONICA MINOLTA, the Konica Minolta logo and symbol mark and "Giving Shape to Ideas" are registered trademarks or trademarks of Konica Minolta, Inc.
- Company names and product names used herein are trademarks or registered trademarks of their respective companies.
- Displays shown are for illustration purposes only.
- The specifications and appearance shown herein are subject to change without notice.



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.

ISO Certifications of KONICA MINOLTA, Inc., Sakai Site



JQA-QMA15888
Design, development, manufacture/
manufacturing management, calibration, and
service of measuring instruments



JQA-E-80027
Design, development,
manufacture, service and sales
of measuring instruments

KONICA MINOLTA, INC.
Konica Minolta Sensing Americas, Inc.
Konica Minolta Sensing Europe B.V.

Osaka, Japan
New Jersey, U.S.A.
European Headquarter /BENELUX
German Office
French Office
UK Office
Italian Office
Swiss Office
Nordic Office
Polish Office
Turkish Office
SE Sales Division
Beijing Office
Guangzhou Office
Chongqing Office
Qingdao Office
Wuhan Office

Konica Minolta (CHINA) Investment Ltd.

Konica Minolta Sensing Singapore Pte Ltd.
Konica Minolta Sensing Korea Co., Ltd.

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page :

Phone : 888-473-2656 (in USA), 201-236-4300 (outside USA)
Nieuwegein, Netherlands
München, Germany
Roissy CDG, France
Warrington, United Kingdom
Cinisello Balsamo, Italy
Dietikon, Switzerland
Västra Frölunda, Sweden
Wrocław, Poland
Istanbul, Turkey
Shanghai, China
Beijing, China
Guangdong, China
Chongqing, China
Shandong, China
Hubei, China
Singapore
Goyang-si, Korea

Phone : +31 (0) 30 248-1193
Phone : +49 (0) 89 4357 156 0
Phone : +33 (0) 1 80 11 10 70
Phone : +44 (0) 1925 467300
Phone : +39 02849488.00
Phone : +41 (0) 43 322-9800
Phone : +46 (0) 31 7099464
Phone : +48 (0) 71 73452-11
Phone : +90 (0) 216-528 56 56
Phone : +86- (0)21-5489 0202
Phone : +86- (0)10-8522 1551
Phone : +86- (0)20-3826 4220
Phone : +86- (0)23-6773 4988
Phone : +86- (0)532-8079 1871
Phone : +86- (0)27-8544 9942
Phone : +65 6563-5533
Phone : +82 (0) 2-523-9726

Fax : 201-785-2482
Fax : +31 (0) 30 24 81 211
Fax : +49 (0) 89 4357 156 99
Fax : +33 (0) 1 80 11 10 82
Fax : +44 (0) 1925 711143
Fax : +39 02849488.30
Fax : +41 (0) 43 322-9809
Fax : +48 (0) 71 734 52 10
Fax : +90 (0) 212-253 49 69
Fax : +86- (0)21-5489 0005
Fax : +86- (0)10-8522 1241
Fax : +86- (0)20-3826 4223
Fax : +86- (0)23-6773 4799
Fax : +86- (0)532-8079 1873
Fax : +86- (0)27-8544 9991
Fax : +65 6560-9721
Fax : +82 (0) 31-995-6511

<https://konicaminolta.com/instruments/network>